



Stylish and modern Exit Light that elevates the look and feel of a space for an upmarket and premium setting.

## Features

- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- 24m viewing
- Simple slide and connect installation
- Wall or ceiling surface mounted
- Complete with running man inserts
- Single or double sided
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293


## Ordering Information

Part Number	Description	Box Quantity
MRX-EXSB	SBLADE LED Slide and Connect 24m Maintained Blade Exit Light c/w Lithium Battery	10

## Specifications

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	2W LED Strip 50,000 hours	Maintained	24m	LiFePO4	> 120 mins	Wall or ceiling, surface mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D6.3 C90 E3.2

## Dimensions

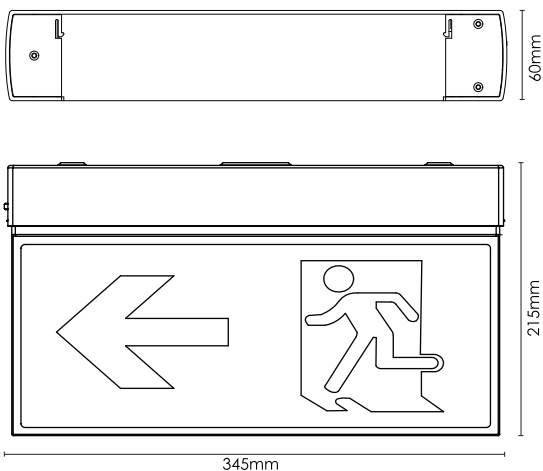

Length	Width	Height	Weight
345mm	60mm	215mm	1.4kg

## Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT			
	2.1m	2.4m	2.7m	3.0m*
C0 - D6.3	8.6	8.8	9.0	9.1
C90 - E3.2	6.0	6.2	6.4	6.6

\* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1

Specifications are subject to change without prior notice due to ongoing improvement.

Exclusive brand endorsed by:

