



The most advanced and user-friendly emergency batten light in its class, produces excellent and reliable illumination in both mains and emergency modes.

Features


- Industry-first slide & connect mounting bracket
- Compatible with EMEREX 'Pod' module for added emergency lighting capability
- High performance LEDs to deliver up to 5000lm
- Choice of high transmission prismatic diffuser or vandal-resistant wireguard
- Optional microwave dimming motion sensor available to deliver up to 89% energy savings
- Surface mounted - wall or ceiling
- Long-life electronics
- Low energy consumption for attractive ROI



Hot-swappable emergency POD



Slide & connect mounting bracket



Glide & fit LED lamp assembly

*hot-swappable design avoids the need to isolate mains prior to plug-in of 'POD' module into 'MODULA' batten


Ordering Information

Part Number	Description	Box Quantity
MRX-DIF122	MODULA 2x18W LED Linear Batten Light c/w High Transmission Prismatic Diffuser	1
MRX-WG122	MODULA 2x18W LED Linear Batten Light c/w High Impact Vandal Resistant Wireguard	1
MRX-EMP3	POD D40 LED Hot-swappable Emergency Light Pod c/w Lithium Battery	1

Specifications

Input	Wiring	Lamp	Mode	Battery	Autonomy	Mounting	IP	Compliance	Classification
MODULA									
230VAC 50Hz	Hardwired into terminal block	2x18W LED 4000K, 5000lm, 84+ CRI	Mains switchable	N/A	N/A	Wall or ceiling surface mount	IP20	RCM, SAA	N/A
POD									
Modula adaptor	Hot-swappable, no wiring required	D40 3W LED	Sustained	LiFePO4	> 120mins	Plug into Modula	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D40 C90 D40

Dimensions

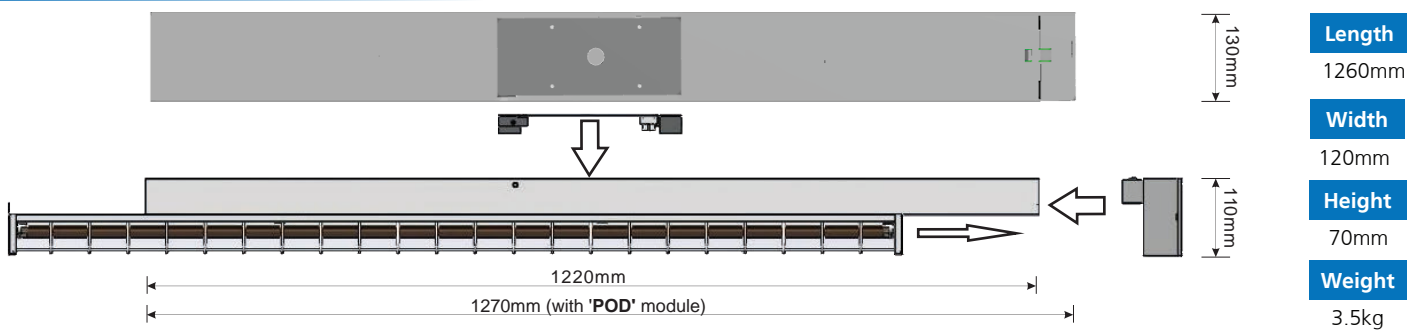

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT							
	2.1m	2.4m	2.7m	3.0m	4.0m	5.0m	6.0m	8.0m
C0 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0
C90 - D40	16.7	17.4	18.0	18.6	20.1	21.3	22.1	23.0

Exclusive brand endorsed by:

