

Supersized Exit Light with increased visibility and viewing distances for large spaces and long escape paths.

Features

- 48m viewing
- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- Wall or ceiling surface mounted
- Complete with running man inserts
- Single or double sided
- Removable lamp bar
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293




Ordering Information

Part Number	Description	Box Quantity
MRX-EXXL	GRANDE LED 48m Maintained Grand Exit Light c/w Lithium Battery	1

Specifications

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	5W LED Strip 50,000 hours	Maintained	48m	LiFePO4	> 120 mins	Wall or ceiling, surface mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D6.3 C90 E3.2

Dimensions

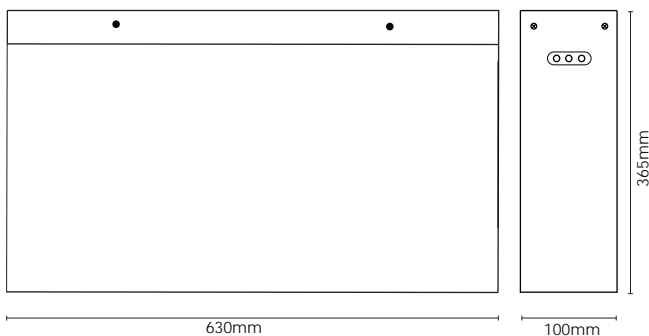

Length

630mm

Width

100mm

Height

365mm

Weight

5.0kg

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT			
	2.1m	2.4m	2.7m	3.0m*
C0 - D6.3	8.6	8.8	9.0	9.1
C90 - E3.2	6.0	6.2	6.4	6.6

* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1

Exclusive brand endorsed by:



Specifications are subject to change without prior notice due to ongoing improvement.