

Emergency Lighting in a versatile linear weatherproof IP65, IK10 batten format that produces excellent and reliable illumination in both mains and emergency modes.

Features

- Optional microwave dimming motion sensor available to deliver up to 89% energy savings
- Multimode, switchable 40W LED array
- Weatherproof IP65, high-impact IK10 rated
- Advanced Lithium batteries
- Surface mounted - wall or ceiling
- Large terminal blocks
- Low energy consumption
- Designed in accordance with AS/NZS 2293


Ordering Information

Part Number	Description	Box Quantity
MRX-EMWP122	APOLLO 40W LED Multimode Weatherproof IP65 Emergency Batten Light c/w Lithium Battery	6
MRX-WP122	APOLLO 40W LED Weatherproof IP65 Batten Light (non-emergency)	6

Specifications

Input	Wiring	Lamp	Mode	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	40W LED 4000K, 3800lm, 84+ CRI	Multimode, switchable	LiFePO4	> 120 mins	Wall or ceiling surface mount	IP65	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D63 C90 D50

Dimensions

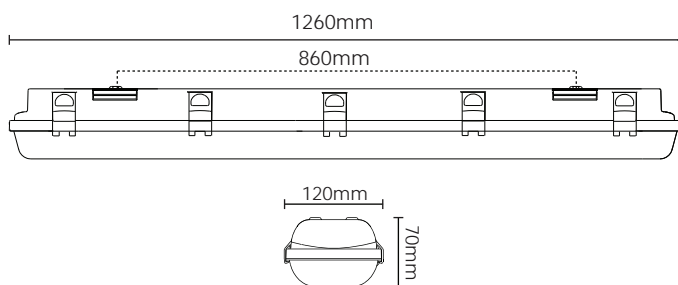

Length	Width	Height	Weight
1260mm	120mm	70mm	3.0kg

Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT							
	2.1m	2.4m	2.7m	3.0m	4.0m	5.0m	6.0m	8.0m
C0 - D63	19.4	20.3	21.1	21.8	23.7	25.2	26.4	28.1
C90 - D50	18.0	18.7	19.4	20.1	21.8	23.2	24.2	25.4

Exclusive brand endorsed by:



Specifications are subject to change without prior notice due to ongoing improvement.